Accessibility, a solution forevery barrier





Platform lifts **CEDAS Silver** UPTO 1000 mm

Silver Trouble-free access, with the best standards of safety and versatility

The **Silver** platform lift is the ideal way of assuring the **ACCESSIBILITY** of:

Private premises (banks, restaurants, shops, offices ...) Public buildings (schools, institutes,) Homes and residential buildings

EASY, SAFE

Easy installation and safety when use make Silver an ideal system for freedom of access to buildings of all types, assuring wheelchair users independent personal mobility.

EXCELLENT CONSTRUCTION

Silver's outstanding features include a stainless steel structure, design with attention to every detail and state-of-the-art active and passive safety features, as well of course as the wellproven CEDAS mechanical drive systems.

The on-board and floor control panels are equipped with keys and can be used easily.


Silver is available with two travel distances: 800 mm and 1,000 mm.

ADAPTS PERFECTLY TO ALL FUNCTIONAL AND AESTHETIC NEEDS

Silver does not require a pit of any kind, meaning installation is really tailored to the existing structures.

PLUS:

CEDAS Warranty Distribution network covering all areas After-sales service

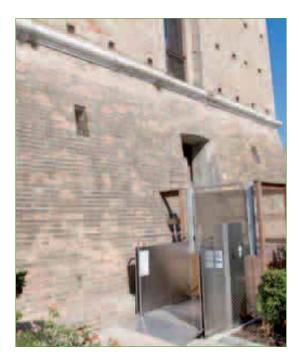













Version with the straight exit

Thanks to its electric lock, the gate is automatically opened when the platform reaches the top.

The standard protected pushbuttons, both on board and for calls at each floors, have keyed controls.

Version with the gate with crystal glass

Standard equipment

Door and guards in stainless steel Posts of the gate in painted metal Hold-to-run controls both on the lift and at the floors Emergency stop on lift Controls at floor and on lift with removable key 24 VDC auxiliary circuit Electromechanical locks with removable contact; Electric locks with EN certification Automatic overspeed safety valve Manual descent function for use in the event of blackout Automatic levelling at floor Door can be opened from exterior with key Anti-crushing edge guard Anti-shearing bellows guard Door and guards in black

Optionals

Automatic doors and gates Glass guards Remote control post Radio controls Motorized gate and 90° exit Stainless steel highly resistant to saline environments

	PLATFORM LIFT S08 SILVER TECHNICAL DATA
Models	 STANDARD Vertical run mm 800 run, footrest mm 1200x850 LARGE Vertical run mm 1000, footrest mm 1400x1120 EXTRALARGE Vertical run mm 1000 run, footrest mm 1400x1250
Finish	Stainless steel; lifting unit with cataphoresis; painted in grey metal gate posts.
Safe working load	250 kg
Speed	0,04 m/sec
Voltage	230 V single phase
Pit	Not necessary
Footrest	Platform finished in non-slip aluminum
Safety mechanisms	Electric lock and triangular key for manual unlock: double security valve

In conformity with:

- the European Directive 73/23/CEE - Low Voltage

- the European Directive 89/336/CEE - EMC

- the European Directive 98/37/CE - Machinery Directive (manufacturer's certification)

This data is indicative and not binding. CEDAS reserves the right to change the specifications without prior notification.



CEDAS ELEVATORS & FABRICATION LLC P.O. Box: 8190 Ajman, U.A.E. Tel.: +971 6 743 7667 Fax: +971 6 748 4131 sales@cedas-uae.com www.cedas-uae.com